



C-102

Dual Monaural Balanced Preamp

Aeron C-102

Dual Monaural Balanced Preamplifier



**Italian Stylish Full Black Aluminum Metal casing design with OLED display.


Description

With the high performance of the unconventional and exceptional IHVC (Internal High Voltage +/-50V) circuit our C-102 preamplifier maintains high dynamic response at RMS 20V output with ZERO Distortion.

The volume control being one of the most important components of a preamplifier, a sophisticated Matrix Relay volume control circuit was chosen for the C-102 in order to achieve a flat response from 5Hz to 200kHz, +/- 0,2dB.

Features & Specifications

- Line Inputs: RCA x2 XLR x1
- Outputs: RCA x2 XLR x1 (selectable)
- Frequency Response: 5-200kHz +/-0.2dB
- Channel Separation: over 115dB
- THD 0.0009% @ 1kHz 1VRM input
- Max. Input Voltage 3VRMS and
Max. Output Voltage 20.2VRMS
- Full Function Metallic IR remote control
- Input AC Voltage: AC117V / 230V Selectable
- Power Consumption: 28W
- Dimensions (WxDxH): 430 x 350 x 90mm
- Weight: 10kg

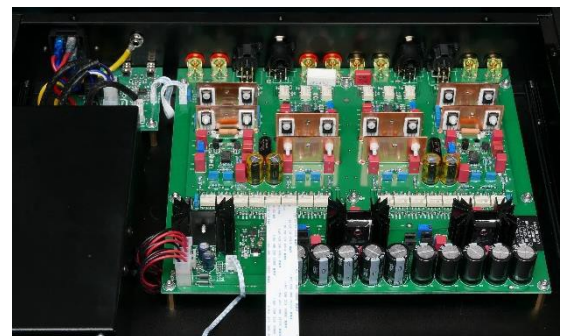

C-102's Mainboard

WorldWide Sales & Marketing Office: Hong Kong
G.A.U. Global Audio Union
Address: G/F., 152 Apliu Street, Shamshuipo, Kowloon, H.K.
Tel: +852 2728 8745 Fax: +852 2729 2962
Email: info@lhe.com.hk

European Distribution:
AUDIO4STEREOLAND
Via Aosta 29 – 39100 Bolzano – Italy
Tel. ++390471 278691 - 02 95838428 - Mobile ++ 393316536676
www.aeron-audio.it – email: info@aeron-audio.it